



“ Delivering high performance in the most demanding environments ”

Type 3 Electric Sliding Gate


The Type 3 Electric Sliding Gate delivers high performance time after time in the most demanding environments. The gate can span openings of 6 metres (single leaf) or up to 12 metres (double leaf) in a cantilever construction.

The frame and stanchions are manufactured using rectangular hollow section and a variety of infill options are available. From its high quality motor and gearbox drive unit and PCB control the gate responds quickly to operator instructions.

The gates can be operated by a wide range of access control systems such as proximity card, push button, keypad or radio control. These combined with induction loop or photocell safety and close facilities make them simple and reliable to operate.

Standard features include a manual operating override facility in case of power failure and a safety edge system, preventing the gate closing on pedestrians or vehicles.

Gate cappings / barbed wire gate tops, fire alarm activation and audible alarms are available as optional extras.

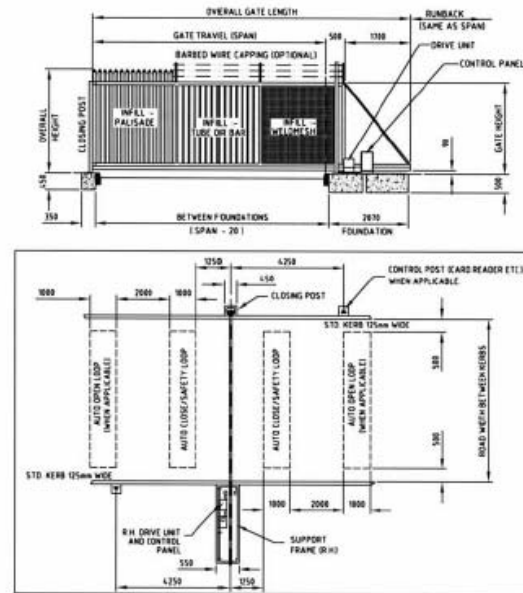

Construction	Frame - Steel, Rectangular hollow section Infill - Tube, Mesh, Palisade, Bar	Standard Opening	As Span
Span(s)	Cantilever - 6000mm max Tracked - Not Available	Manual Operation	Included as Standard
Dimensions	See above details	Finish	Standard - 3 x Coat paint treatment Optional - Galvanised / Zinc coated
Drive Unit	Motor and Gearbox / Drive Pack	Control Options	Card, Radio, Token, Keypad, Intercom, Push Button, Vehicle Transponder, Induction Loop and Photocell
Operating Supply	230v 1Ph 50Hz - 6 amps	Safety Features	Standard - 3(no) - Safety Edges Optional - Induction Loop or Photocell
Operating Speed	150mm/sec	Accessories	Fire Alarm Activation, Barbed Wire, Rotor Spikes, Audible Alarm, Flashing Beacon, Access Reader Posts
Power	1 Kw	Approved Standards	C.E.

SAE SYSTEMS

